



RoHS Compliant

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 300V AC DC
- 4 Rated current: 9.0 A AC DC
- 5 Withstand Voltage: 1600V AC/minute
- 6 Temperature Range: $-45^{\circ}\text{C} \sim +85^{\circ}\text{C}$

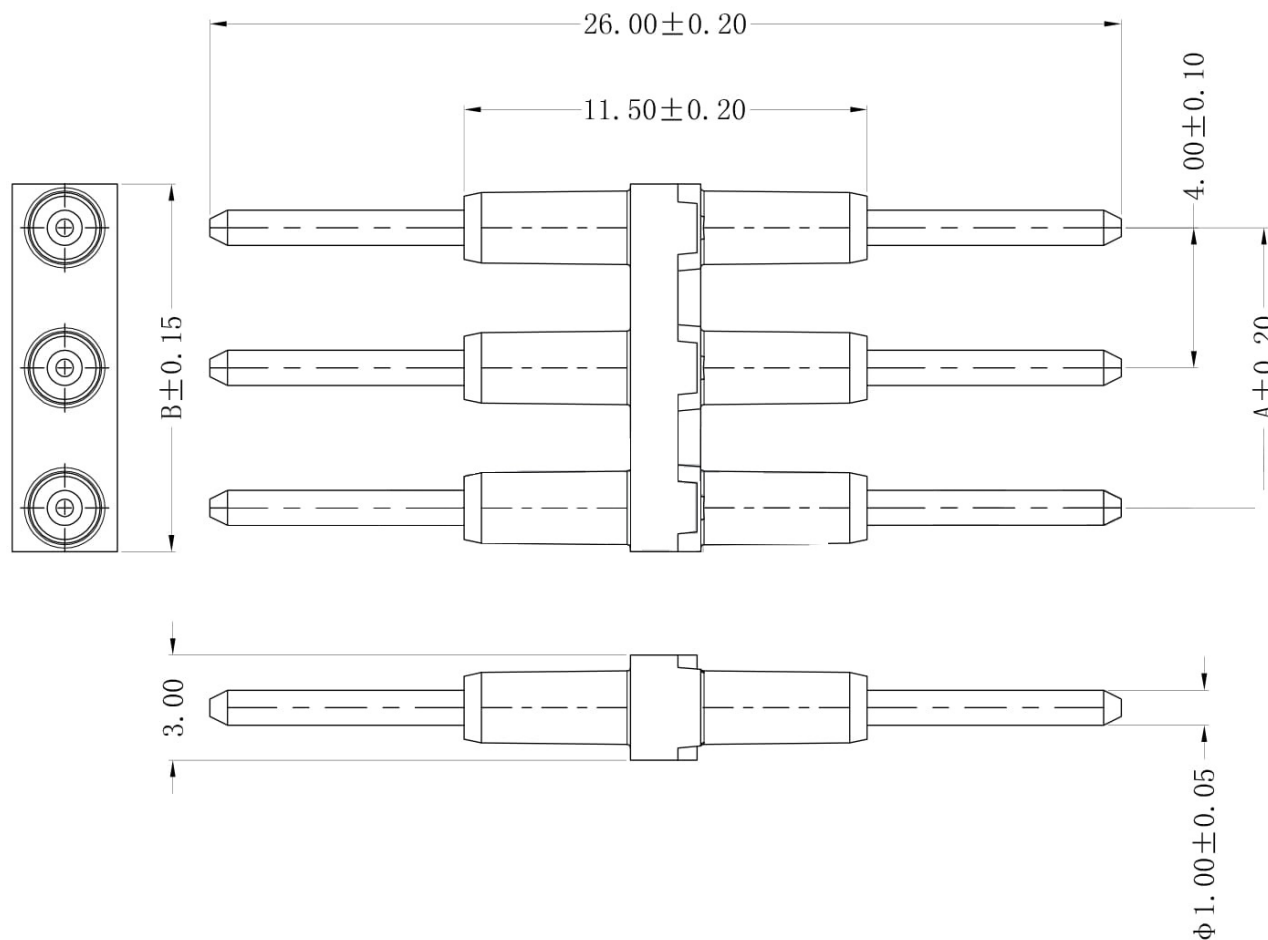

Circuits	Dimensions (mm)	
	A	B
01	-	3.00
02	4.00	6.50
03	8.00	10.50

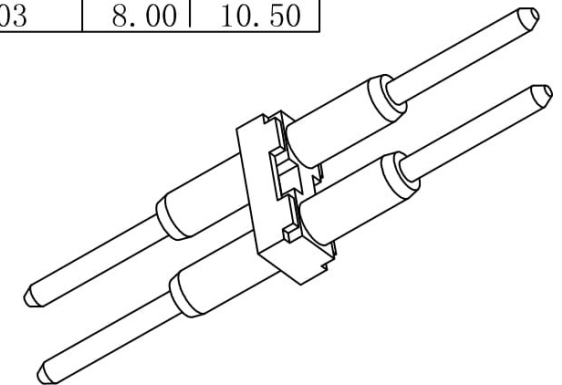

REV.	DATE	DESCRIPTION	APPD.	NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR
B/0	2018.01.25	NEW RELEASE		②	Material	1~3	Brass	Tin-plated
				①	Insulator	1	PA66 (UL94V-0)	Nature (Beige)

Tolerance	Model Name:4.00mm Pitch 180° Wafer		
X.X ±0.30	Model No:T4001G-**-A1MA-A		
X.XX ±0.20		SCALE:FULL	REVISION:B/0
X.XXX ±0.10			
Angle ±3.0°			
UNIT: mm			