

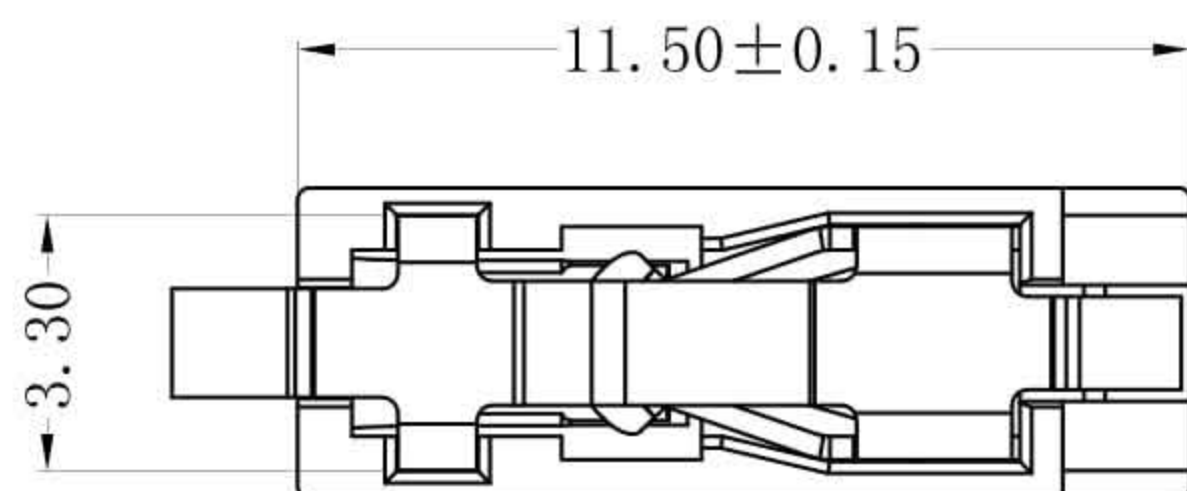
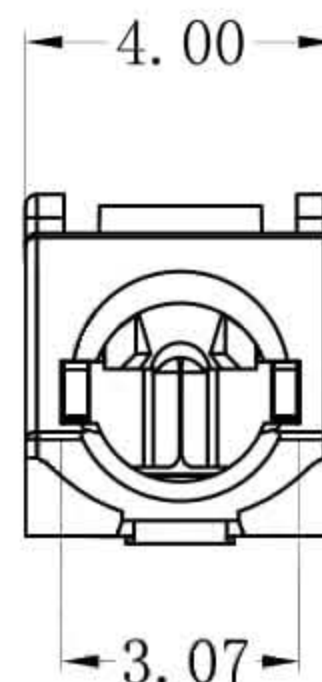
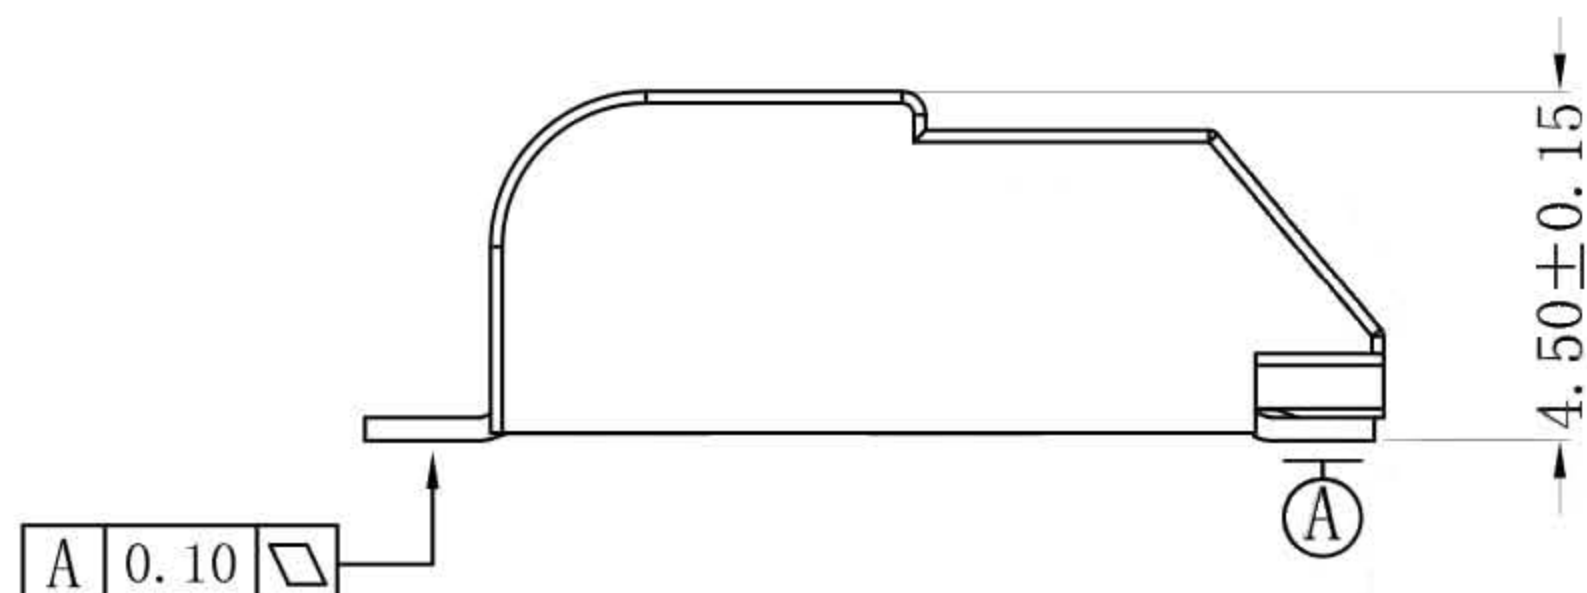
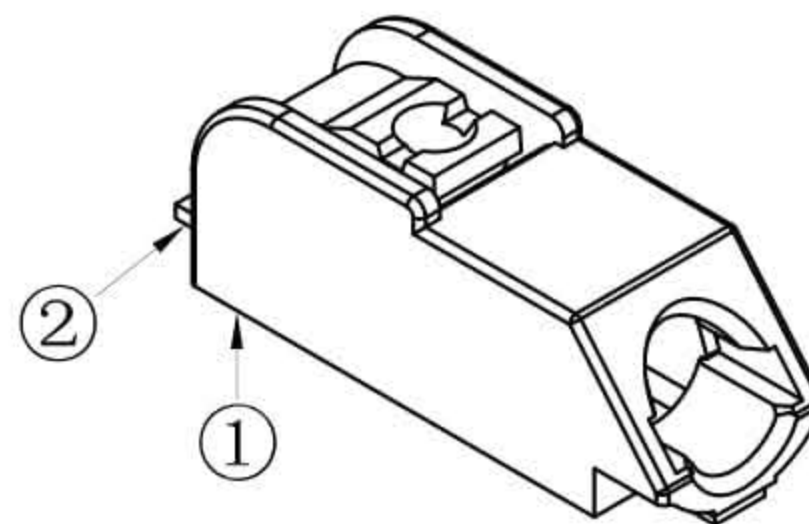


RoHS Compliant

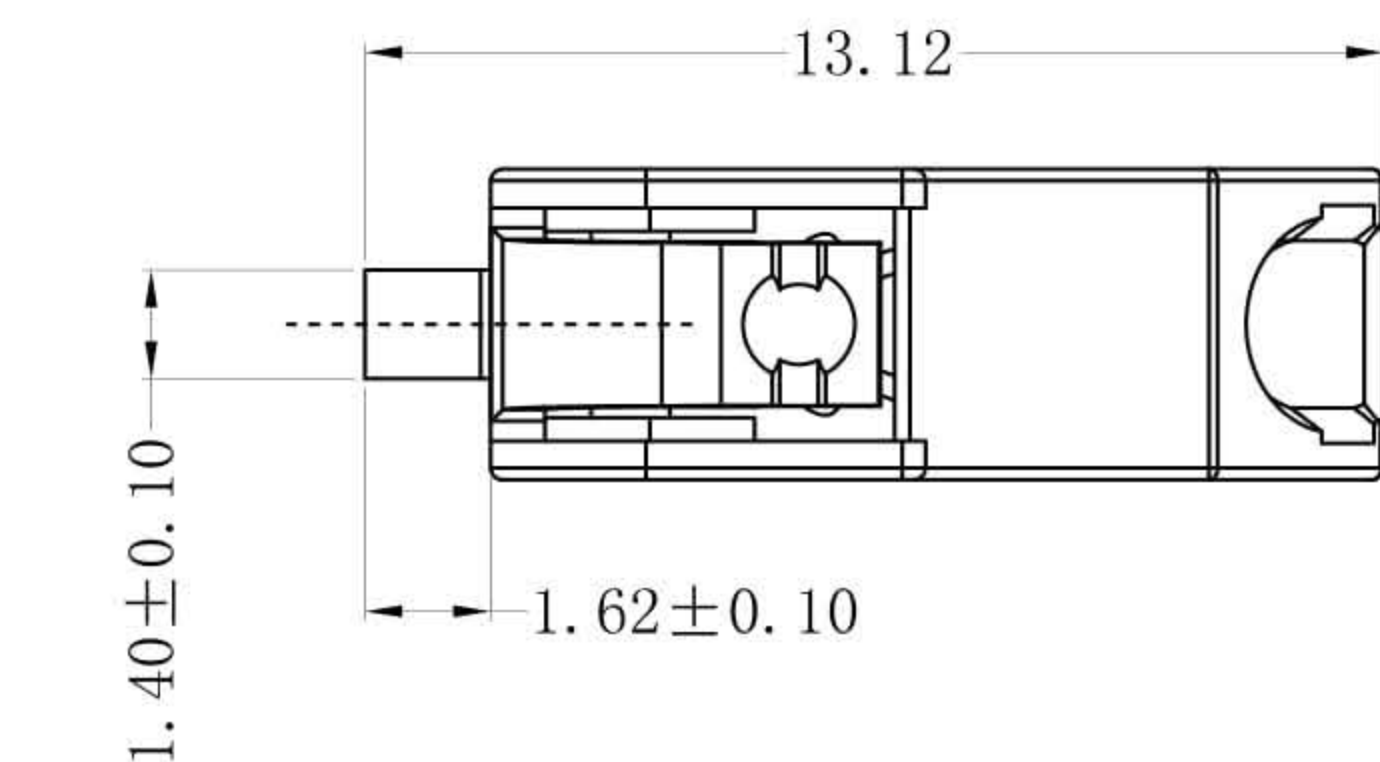

SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 300 V AC DC
- 4 Rated current: 6.0 A AC DC
- 5 Withstand Voltage: 1600V AC/minute
- 6 Temperature Range: $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 7 Recommended to use Solid wire
AWG#24~18(0.2~0.75mm²)

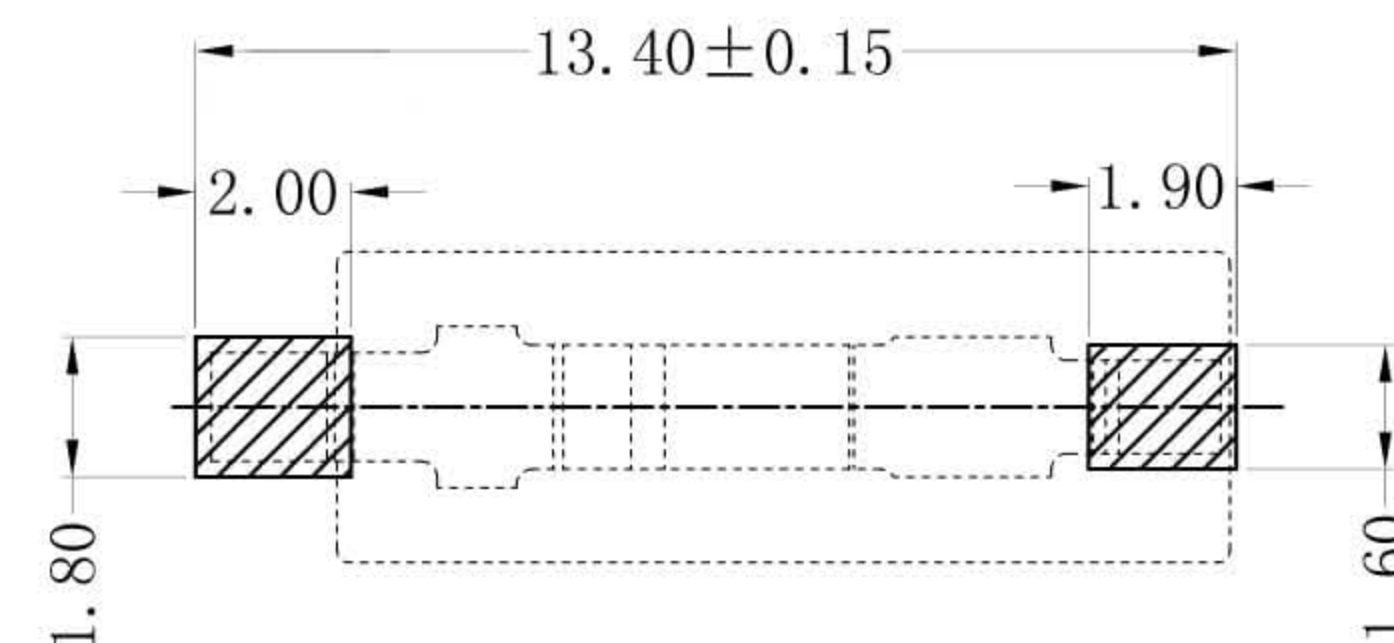

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

B/0	2017. 11. 21	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.

②	Contacts	1	Phosphor Bronze	Mattn-Sn
①	Insulator	1	LCP(UL94V-0)	Nature(Beige)
NO.	DESCRIPTION	QTY	MATERIAL	PLATING/COLOR

Tolerance X.X ±0.30 X.XX ±0.20 X.XXX ±0.10 Angle ±3.0° UNIT: mm	Model Name: 4.00mm PITCH 90° WAFER		
	Model No: T4002M-01-F2MB-R		
		SCALE: FULL	REVISION: B/0