

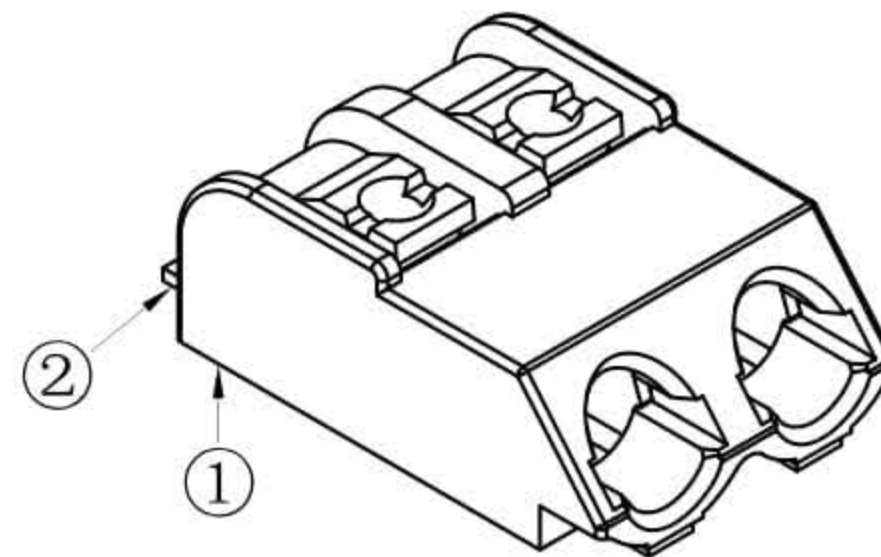
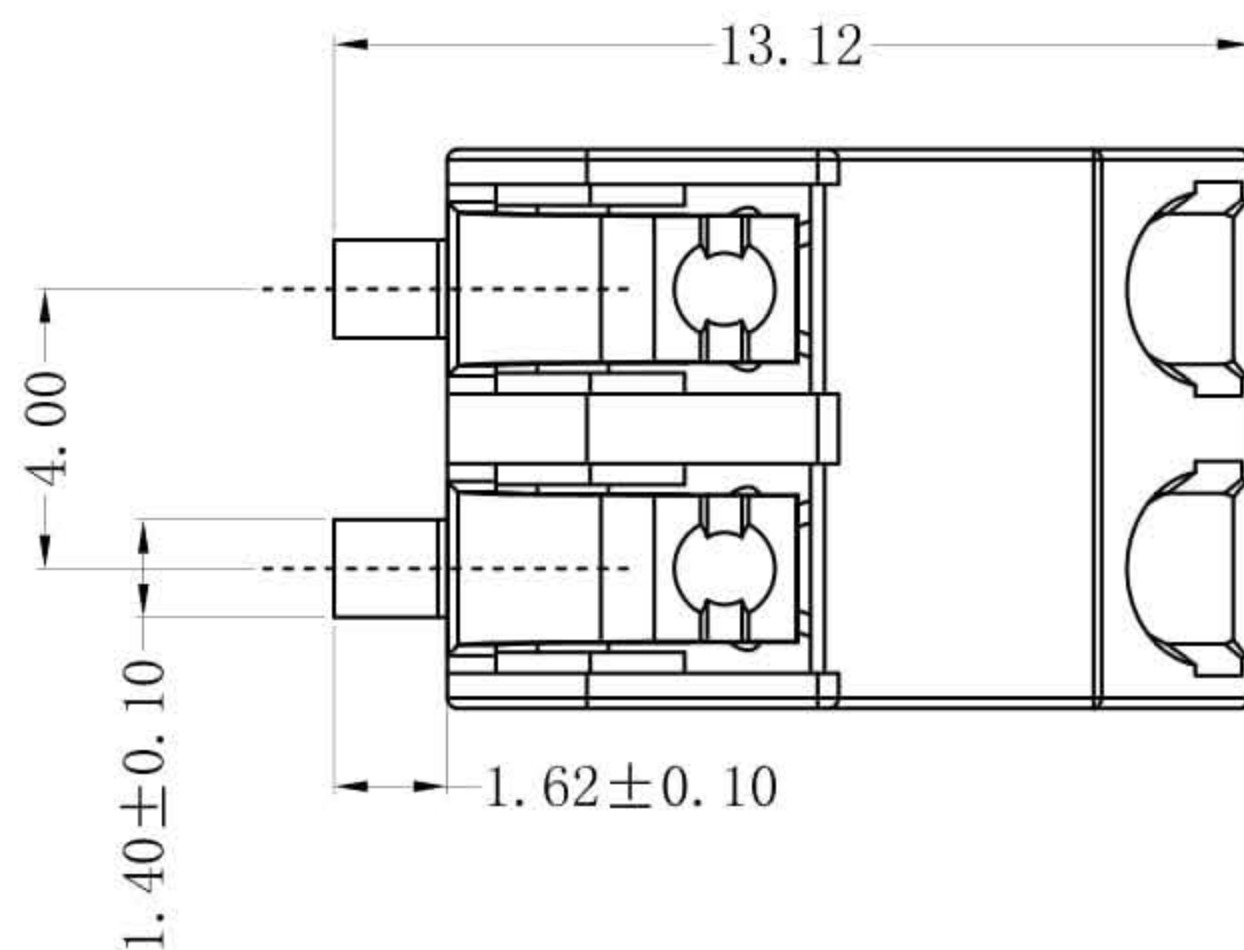
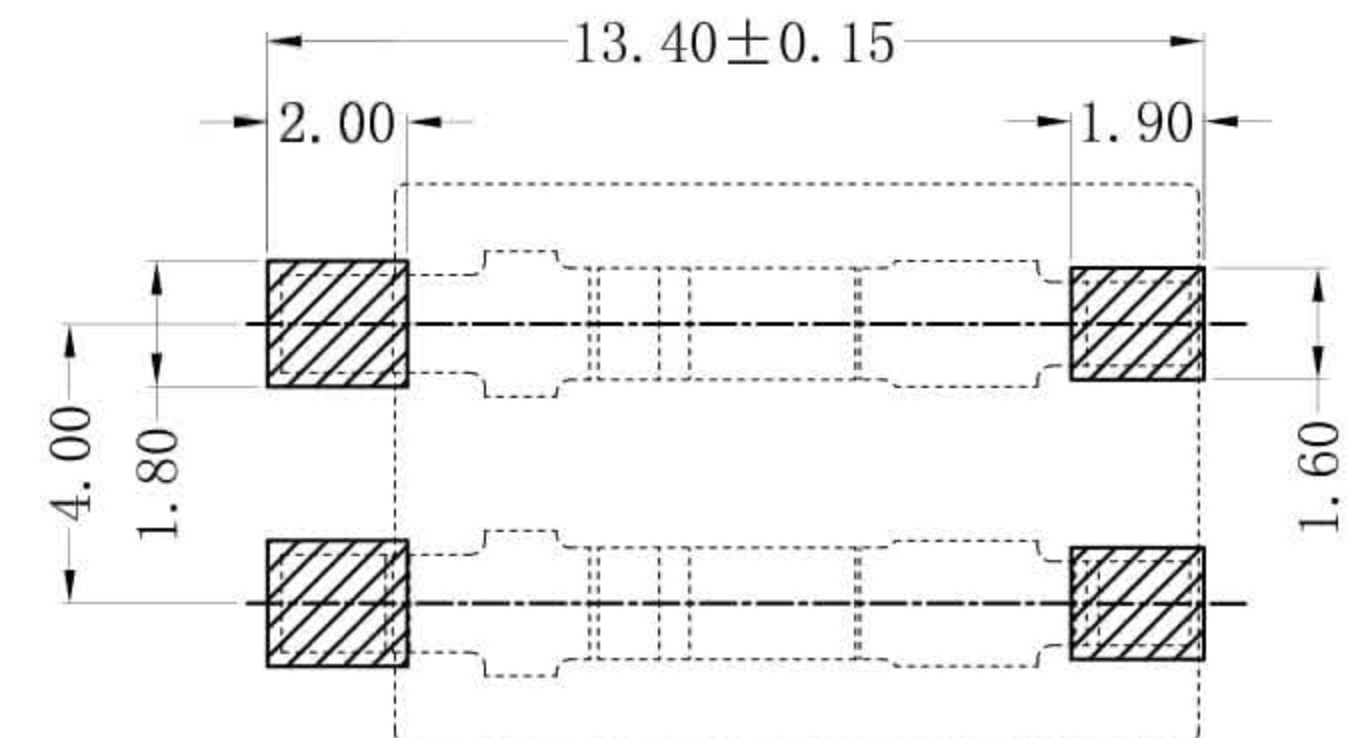
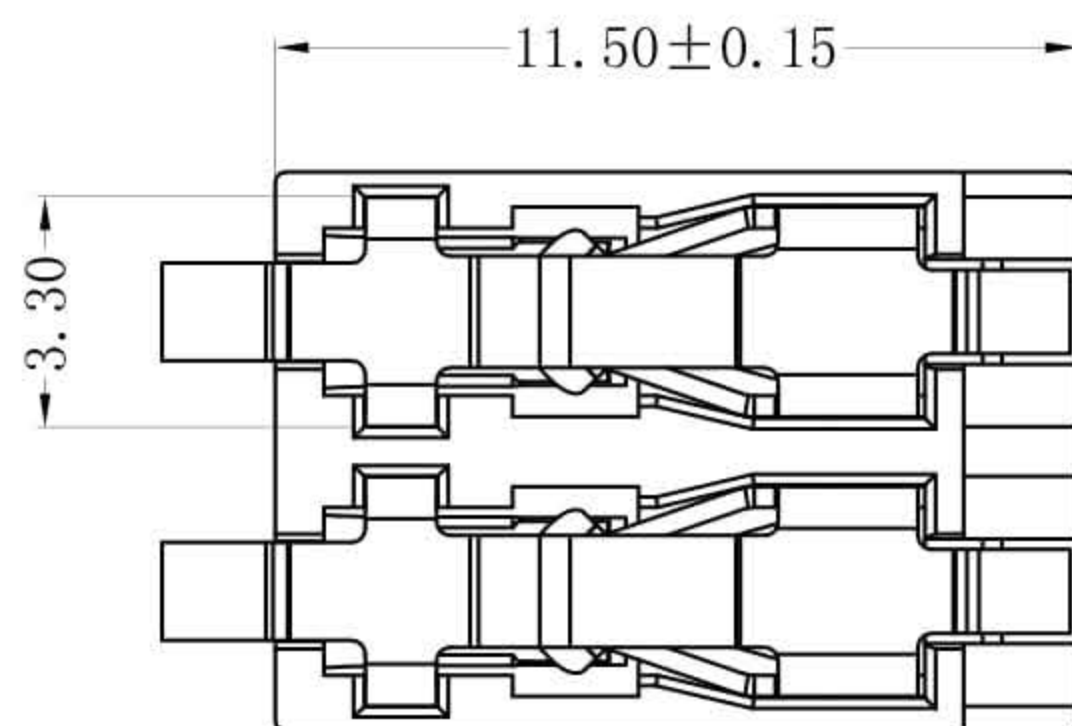


RoHS Compliant

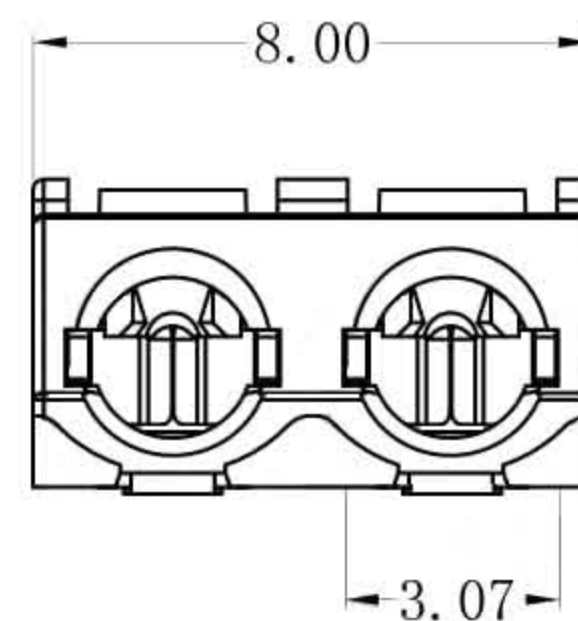


SPECIFICATION

- 1 Contact resistance: $\leq 20\text{m}\Omega$
- 2 Insulation resistance: $\geq 1000\text{M}\Omega$
- 3 Rated voltage: 300 V AC DC
- 4 Rated current: 6.0 A AC DC
- 5 Withstand Voltage: 1600V AC/minute
- 6 Temperature Range: $-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$
- 7 Recommended to use Solid wire
AWG#24~18 (0.2~0.75mm²)

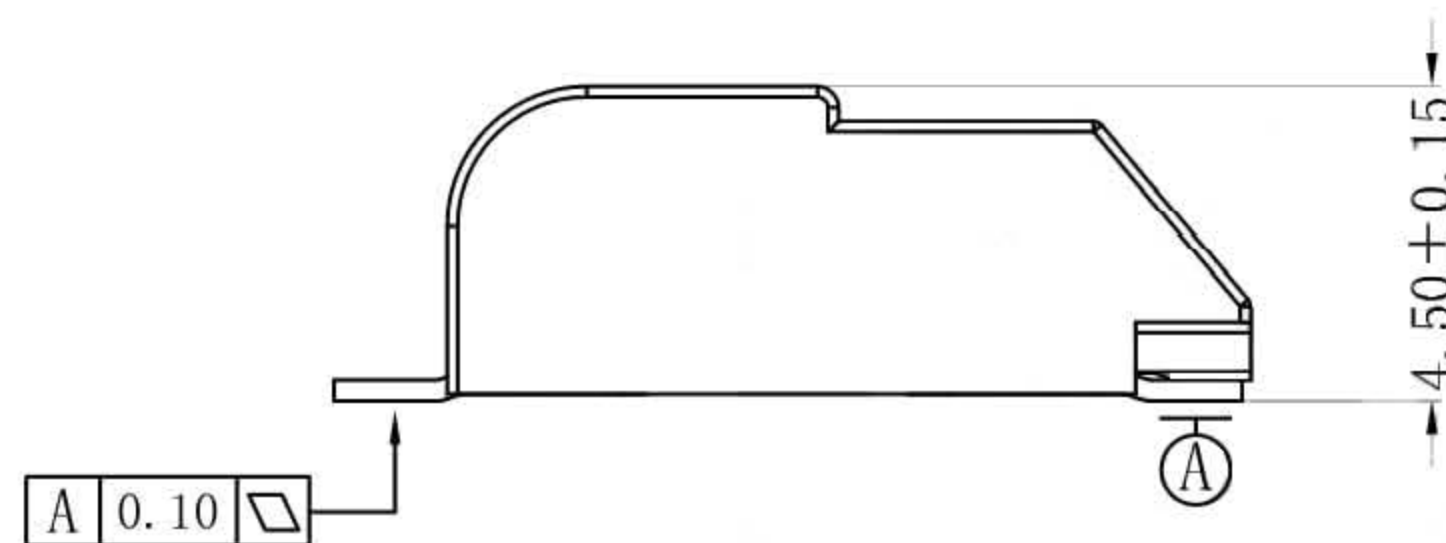

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

Tolerance	Model Name:4.00mm PITCH 90° WAFER			
X.X ±0.30	Model No: T4002M-02-F2MB-R			
X.XX ±0.20		SCALE:FULL	REVISION:B/0	
X.XXX ±0.10				
Angle ±3.0°				
UNIT: mm				

B/0	2017.11.21	NEW RELEASE	
REV.	DATE	DESCRIPTION	APPD.

② Contacts 2 Phosphor Bronze Mattn-Sn

① Insulator 1 LCP (UL94V-0) Nature (Beige)

NO. DESCRIPTION QTY MATERIAL PLATING/COLOR